

Mobile Point-of-Care Terminal

POCm-W22C-ADL
POCm-W24C-ADL

22"/24" Medical Panel PC with 12th Gen Intel®
Core™ i5 processor

Features

- 12th Gen Intel® Core™ i5 processor (Alder Lake-P)
- Anti-bacteria housing with IP65 front bezel and IP32 rear cover protection
- PCAP touch allows multi-touch, multi-layer gloves and water-on-screen operation
- Three hot-swappable batteries with a total runtime of 8 hours, ideal for non-powered medical carts



E-Window

» Nursing efficiency & space optimization




▲ The 3 hot-swappable batteries can provide sufficient power for 8-16 hours


▲ Daily clinical workflow is optimized greatly with 6-bay stackable charging station.



IT Center

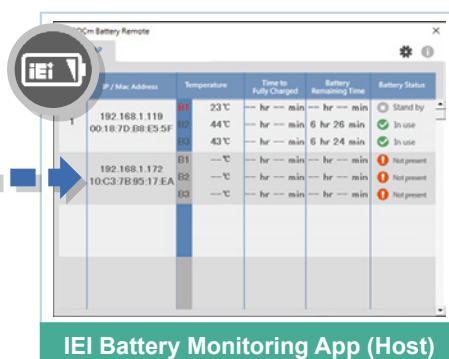


IEI Battery Monitoring App (Host)

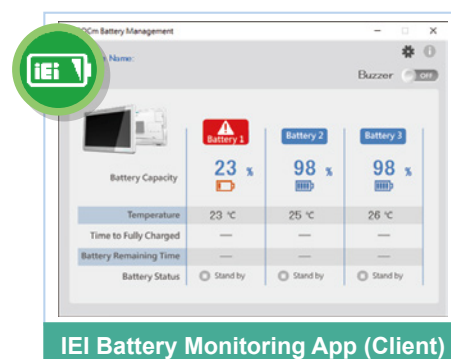

IEI Battery Monitoring App (Client)

▲ IEI Battery Monitoring App

» Improving medical environment with IEI medical panel PC

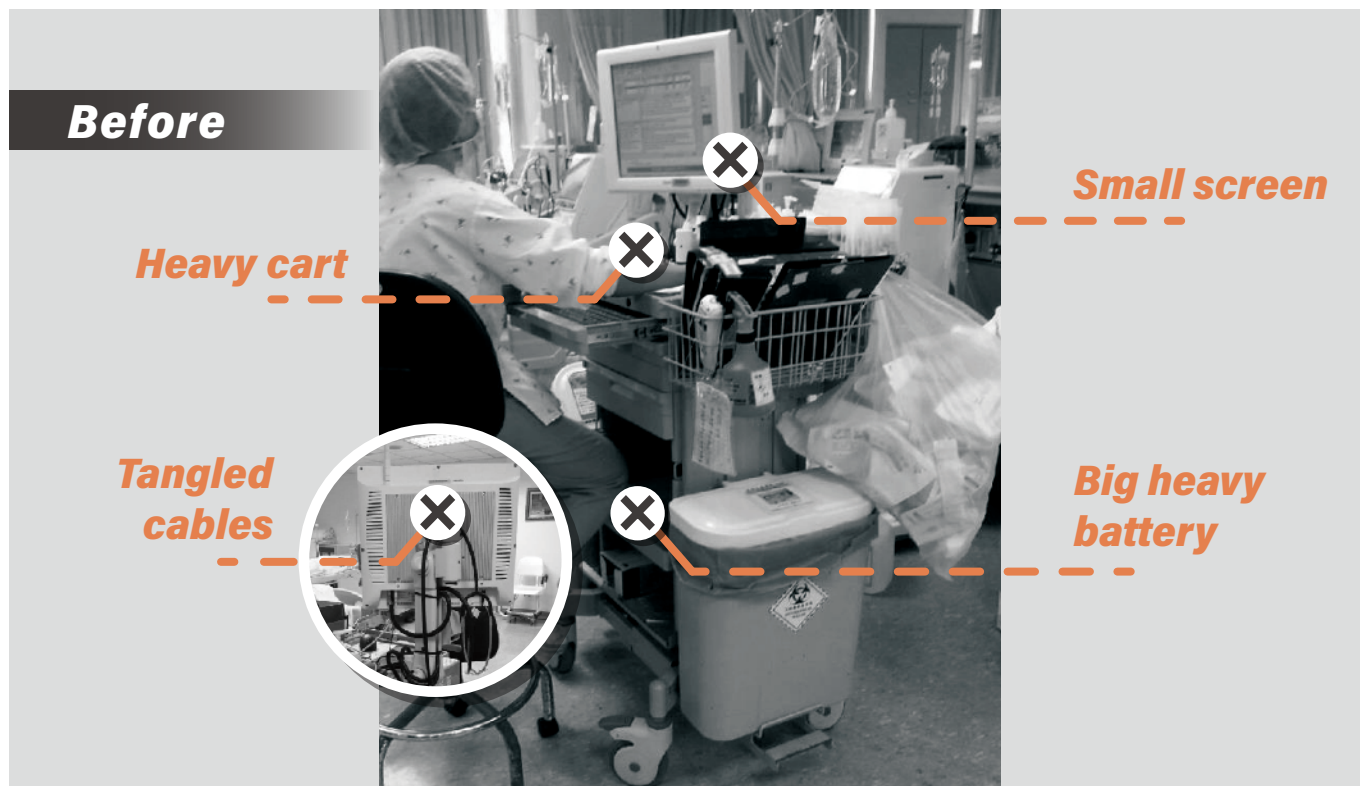

Deploy IEI AIO Medical Panel PC
POCm Series



Cost effective



Save time



Specifications

Model		POCm-W22C-ADL	POCm-W24C-ADL
LCD Specifications	LCD Size	21.5" (16:9)	23.8" (16:9)
	Max. Resolution (W/H)	1920 x 1080	
	Brightness (cd/m²)	350	
	Contrast Ratio	1000:1	
	LCD Color	16.7M (RGB 8-bit)	
	Pixel Pitch (H/V)	0.24795 (H) x 0.24795 (V) mm	0.2745 (H) x 0.2745 (V) mm
	Viewing Angle (H/V)	178°/178°	
	Backlight MTBF (hrs)	50,000 (LED backlight)	30,000 (LED backlight)
Touch	Touchscreen	Projected capacitive type with 10-point multi-touch	
	Touch Controller	EETI	
	Surface Hardness	6H	
System	CPU Support	12th Gen Intel® Core™ i5-1245UE/i7-1265UE (Alder Lake-P)	
	LAN Controller	2 x Intel® I225 Ethernet Controller	
	RAM	On-board 16GB 1866MHz LPDDR4X	
	Storage	1 x 2.5" accessible SATA HDD bay 2 x M.2 2280 M key (PCIe/SATA) with RAID	
	Audio	2 x 2W speaker	
	Microphone	1 x Digital microphone	
	Camera	5-megapixel CMOS front-facing camera / AI camera (optional)	
	I/O Port	Bottom 1 x DC jack 1 x Digital mic 1 x HDMI output 1 x USB Type-C (DP + USB 5V/3A) 1 x DC output (12V/19V/24V, 20-watt) 2 x 2.5GbE LAN port 1 x RS-232/422/485 port 2 x USB 3.2 Gen 2 (10Gb/s) port 2 x USB 2.0 port	Side 1 x Mic in 1 x Audio out 2 x USB 2.0 port
	OSD Function	1 x Power on/off 1 x Volume up 1 x Volume down	1 x Brightness up 1 x Brightness down 1 x LCD on/off and touch lock for cleaning
	Expansion	1 x PCIe Mini (PCIe) 1 x M.2 2230 A-E key (PCIe+USB) 2 x M.2 2260/80 B-M key (PCIe/SATA)	
	LED	1 x RFID indicator 1 x Power indicator 3 x Battery indicator (color: blue/red)	
	Wi-Fi & Bluetooth	IEEE 802.11ax 2T2R module (Wi-Fi 6E) with BT v5.2 (M.2 2230 A-E key)	
Physical	Construction Material	ABS+PC plastic (ENH2900)	
	Mounting	Wall, Stand and Arm; VESA 75/100 compliant	
	Weight (Net)	7.07 kg (without battery) 8.43 kg (with 3 batteries)	8.18 kg (without battery) 9.53 kg (with 3 batteries)
	Dimensions (LxWxH)	543 x 350 x 71 mm	594.6 x 379.6 x 71 mm
Environment	Operating Temperature	0°C – 40°C	
	Storage Temperature	-20°C – 60°C	
	Humidity	10% – 90% (non-condensing)	
	Vibration	1G	
	Shock	Operating shock: 5G peak acceleration (11ms duration) Non-operating shock: 10G peak acceleration (11ms duration)	
	IP Level	Front: IP65	
	Thermal	Fanless	
Power	Power Input	19V DC input	
	Power Adapter	150W medical power adapter	
	Battery	3 slots for Li-ion battery packs	
Certification	EMC & Safety	CE, FCC Class B Part18 EN 60601-1: 2006/A1:2013 (Edition 3.1) EN 60601-1-2: 2015 (Edition 4.0)	

Ordering Information

Part No.	Description
22"	POCm-W22C-ADL-A-i5/PC-R10 21.5" 350cd/m ² FHD medical panel PC with 12th generation 10nm Intel® Alder Lake-P Core™ i5-1245UE 4.1GHz on-board processor, on-board 16GB LPDDR4X, 802.11a/b/g/n/ac/ax Wi-Fi 6E module, PCAP touchscreen, AI camera, D-mic, w/o battery, R10
	POCm-W22C-ADL-A-i7/PC-R10 21.5" 350cd/m ² FHD medical panel PC with 12th generation 10nm Intel® Alder Lake-P Core™ i7-1265UE 4.4GHz on-board processor, on-board 16GB LPDDR4X, 802.11a/b/g/n/ac/ax Wi-Fi 6E module, PCAP touchscreen, AI camera, D-mic, w/o battery, R10
	POCm-W22C-ADL-i5/PC-R10 21.5" 350cd/m ² FHD medical panel PC with 12th generation 10nm Intel® Alder Lake-P Core™ i5-1245UE 4.1GHz on-board processor, on-board 16GB LPDDR4X, 802.11a/b/g/n/ac/ax Wi-Fi 6E module, PCAP touchscreen, 5M camera, D-mic, w/o battery, R10
	POCm-W22C-ADL-i7/PC-R10 21.5" 350cd/m ² FHD medical panel PC with 12th generation 10nm Intel® Alder Lake-P Core™ i7-1265UE 4.4GHz on-board processor, on-board 16GB LPDDR4X, 802.11a/b/g/n/ac/ax Wi-Fi 6E module, PCAP touchscreen, 5M camera, D-mic, w/o battery, R10
24"	POCm-W24C-ADL-A-i5/PC-R10 23.8" 350cd/m ² FHD medical panel PC with 12th generation 10nm Intel® Alder Lake-P Core™ i5-1245UE 4.1GHz on-board processor, on-board 16GB LPDDR4X, 802.11a/b/g/n/ac/ax Wi-Fi 6E module, PCAP touchscreen, AI camera, D-mic, w/o battery, R10
	POCm-W24C-ADL-A-i7/PC-R10 23.8" 350cd/m ² FHD medical panel PC with 12th generation 10nm Intel® Alder Lake-P Core™ i7-1265UE 4.4GHz on-board processor, on-board 16GB LPDDR4X, 802.11a/b/g/n/ac/ax Wi-Fi 6E module, PCAP touchscreen, AI camera, D-mic, w/o battery, R10
	POCm-W24C-ADL-i5/PC-R10 23.8" 350cd/m ² FHD medical panel PC with 12th generation 10nm Intel® Alder Lake-P Core™ i5-1245UE 4.1GHz on-board processor, on-board 16GB LPDDR4X, 802.11a/b/g/n/ac/ax Wi-Fi 6E module, PCAP touchscreen, 5M camera, D-mic, w/o battery, R10
	POCm-W24C-ADL-i7/PC-R10 23.8" 350cd/m ² FHD medical panel PC with 12th generation 10nm Intel® Alder Lake-P Core™ i7-1265UE 4.4GHz on-board processor, on-board 16GB LPDDR4X, 802.11a/b/g/n/ac/ax Wi-Fi 6E module, PCAP touchscreen, 5M camera, D-mic, w/o battery, R10

Options

Item	Number	Description
RFID	19B00-000432-00-RS	Mifare RFID reader for POCm, 13.56MHz, Z641, RFID board + antenna, IEI assembly only
TPM	TPM-IN03-R10	20-pin Infineon SPI TPM 2.0 module, software management tool, firmware V7.63
Charging Docking Station	POCm-DOCKING-6BAY-R10	6-slot battery charger, LED indicator, 15V/280W power adapter
OS Image		OS image with Windows Embedded Standard 10 E Value 64-bit 2019 for POCm-W22C/W24C ADL Series
Cable Cover	43106-0272Q7-00-RS	Cable cover for POCm, white, plastic, R10, IEI assembly only
Battery		3S3P GA Li-ion battery pack, 10.8V, 9000mAh, CCL, RoHS, IEI assembly only

IQ Mounting Options


Item	Part No.
Arm	ARM-31-RS
Stand	STAND-A21-R10 (black)
	STAND-A21W-R10 (white)

Packing List

Item	Q'ty	Remark
Power Adapter	1	150W medical power adapter
Power Cord	1	European power cord, 180 cm, C13

POCm-W22C-ADL

Dimensions (Unit: mm)

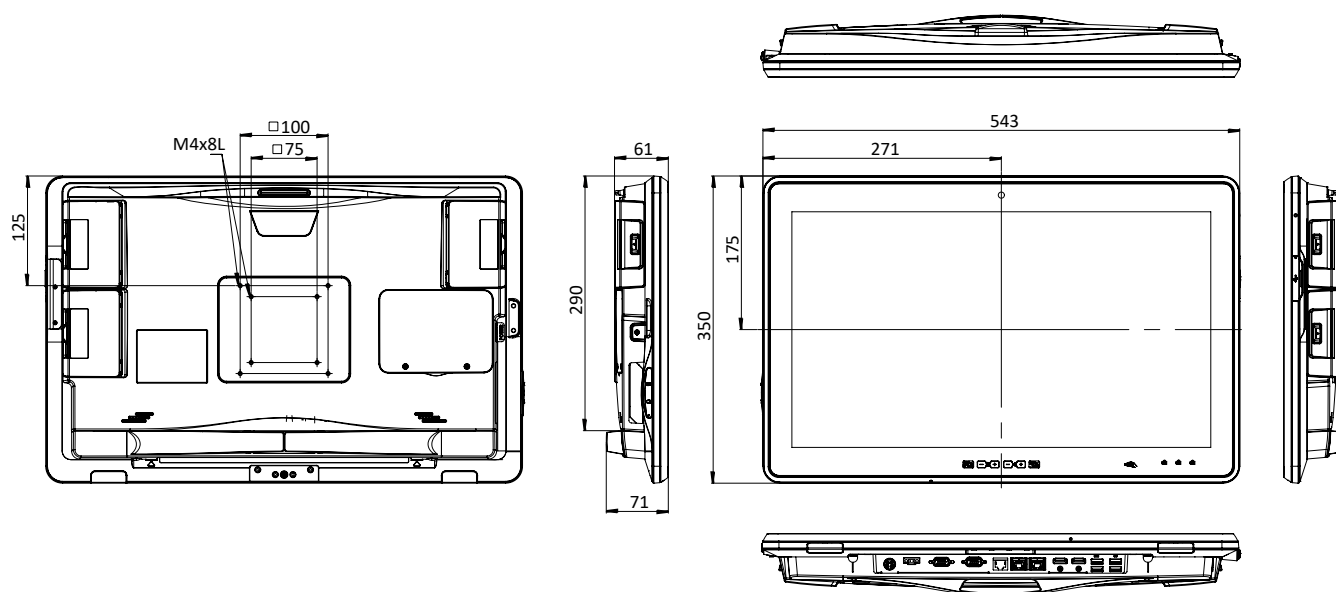

POCm-W24C-ADL

Dimensions (Unit: mm)

